



DR Technal

OPALÉ

PARTITION SYSTEM







OPALE, an extensive range of internal architectural solutions



Photography: DR Technal

A complete solution

The Opale partition offers an infinite amount of internal architectural solutions: partitions with an aluminium frame or with glazed panels fixed side by side.

The possibility of integrating solid or glazed infills, as well as aluminium or glass doors, makes the Opale partition the ideal internal architectural solution.

With its 3 assembly systems - standard partition, with a narrow rail or recessed junctions - the Opale partition offers huge scope for creative flexibility to meet whatever kind of architectural effect you are hoping to achieve.

The Opale partition system can also accommodate hinged doors and sliding doors.

Elegant and versatile, the Opale range is designed for a range of different markets: hospitals, offices, commercial premises, museums, etc.



OPALE, partition system



Key features

Design

- The possibility of creating framed partitions or using glazed panels fixed side by side for a sleek design.
- 3 types of applications: standard partition, with a narrow rail or with a recess junction (Technal patented system).
- A huge variety of infills: plasterboard or woodchip panels, composite materials, clear glazing, screen printed designs or safety glass (in accordance with current standards).
- It is possible to integrate doors made from safety glass (6.6 or 8.8 mm), wooden doors (40 mm) or those with an aluminium frame. These applications are available in hinged and full-access versions.

Modularity

- The partition starting from walls or multi-departing (2 to 4).
- Possibility of continuing on from a 100 mm plasterboard partition 100 mm.
- No modification or cutting work required for installation.
- Installation modifications can be made and modules can be interchanged easily.

Performance

- Moveable and removable partition: CER.F.F. C.07-433R.
- ETA: European Technical Approval n° ETA - 07/0308.
- Acoustics: Up to 44dB for solid standard partitions with plasterboard panels.
- Mechanical stability: shock resistance to hard and soft body impacts as well as horizontal pressure without permanent deformation or surface alteration.
- Fire resistance:
 - Schott flame guard test carried out on an Opale partition system with glazed panels fixed side by side.
 - Class E 30 (PF30).



OPALE, Partitions

3 systems to adapt to all types of projects

Standard partition


An infinite range of configurations and combinations is possible:

- Solid or glazed modules: full height, on a solid apron wall, multi-transom or glazed panels fixed side by side.
- Easy to move and to disassemble.



Flat partition with narrow rail and pictures rail

- High level of finish with the floor and the possibility of adding decorative touches.
- Solid or glazed modules with full-height versions available (fixed or moveable), on a solid apron wall (glazed partition), multi-transom or glazed panels fitted side by side.
- Actuation systems for adjusting the flat partitions.
- Moveable and removable.



Flat partition with wooden recess junction

- High-end aesthetics for internal architecture:
- Solid full-height module.
 - Moveable and removable.



Aesthetics and comfort

- Vertical or horizontal frames which can be customised with different beads.
- Corner enhancement with straight or round aesthetics.
- Possibility of integrating blinds or lighting between two glazed panels.
- Separation of different electrical and computing wiring using a cable channel.



Cable channel



Built-in blind



Featured beads




OPALE, Incorporation of doors

Opale partition systems can accommodate 3 types of doors:


- A wooden door that is 40 mm thick
 - A safety glass door that is 6.8 or 8.8 mm thick.
 - Doors with aluminium frames.
- These applications are available in hinged and full-access versions.

Hinged door


- 1 and 2-leaf applications.
- Varied selection of finishes and ergonomic handles: door knobs, push-down handles, pull handles.
- Pre-machined unit (push-down handle, door knob).
- Common frame for all types of opening frame.



Wooden door

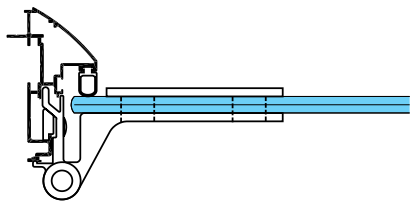

Glass door



Aluminium door



Pull door handle



Door handle




Door knob

Full-access sliding door

The opening frames fit seamlessly within the partition.

- 1 and 2-leaf applications with or without mullion.
- Maximum dimensions:
H 3 m x width 1.2 m.
- Maximum weight per leaf: 100 kg.
- Easy to operate using a roller bearing system.
- Easy opening thanks to the pull handle with an optional lock.
- Common frame for all types of opening systems.

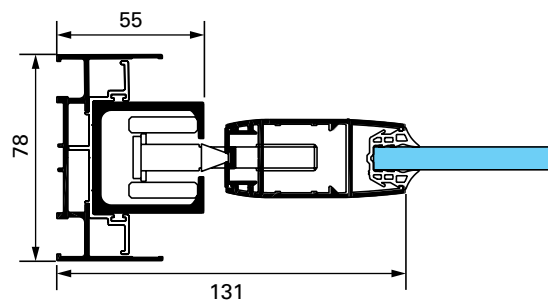


Cross-section of a sliding door


Sections

Standard partition

Full-height glazed module in a frame or fixed side by side

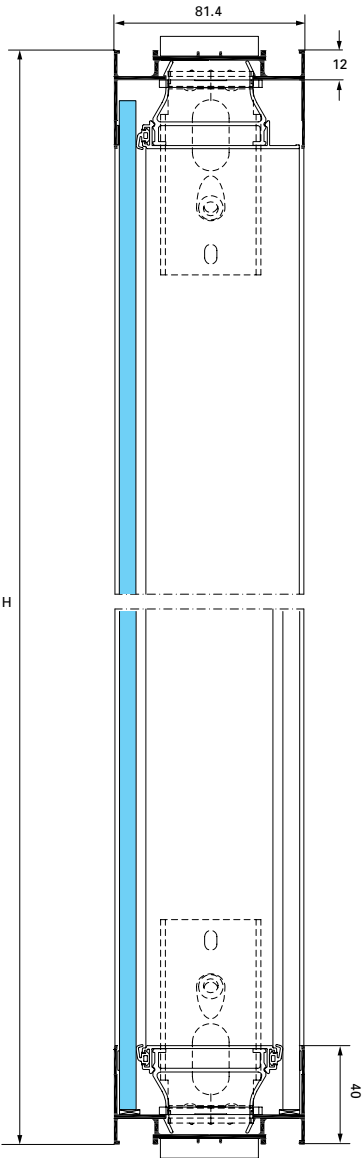


Full-height solid module

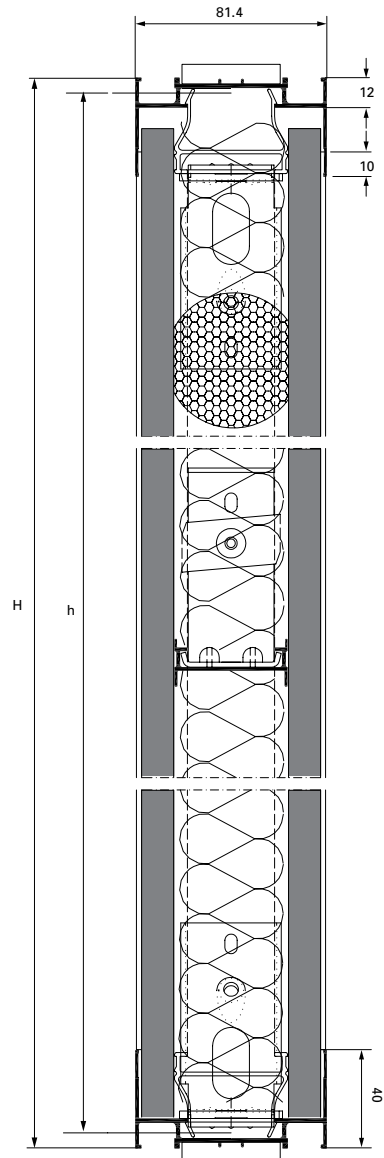


Flat partition with narrow rail


Full-height glazed module

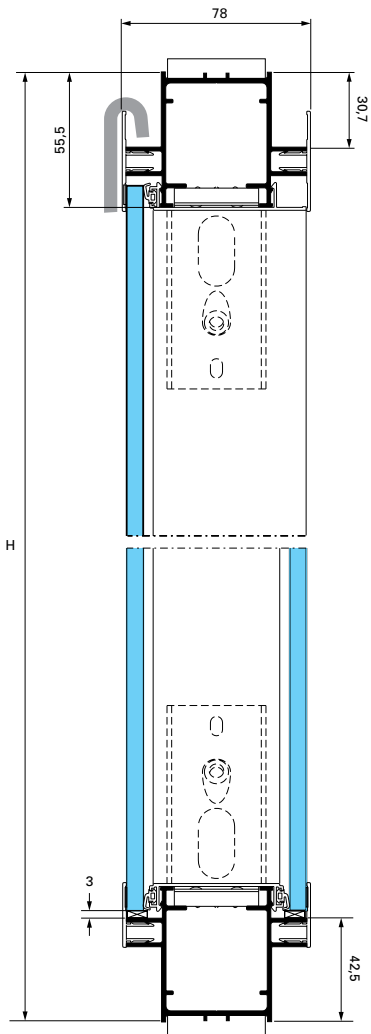

Full-height solid module

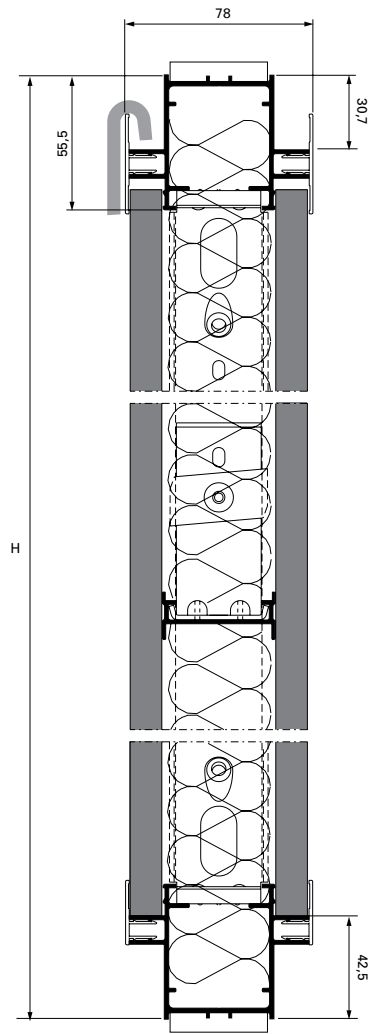


Flat partition with recess junction

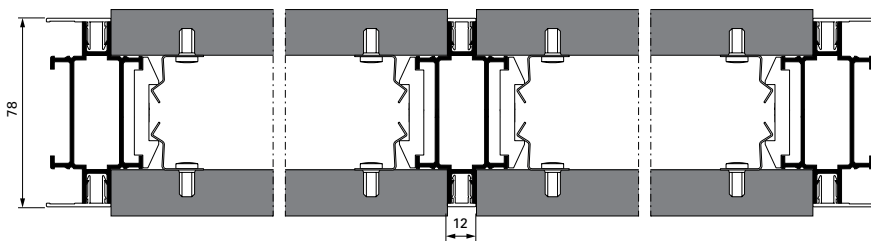


Sections

Hinged doors


Wooden door

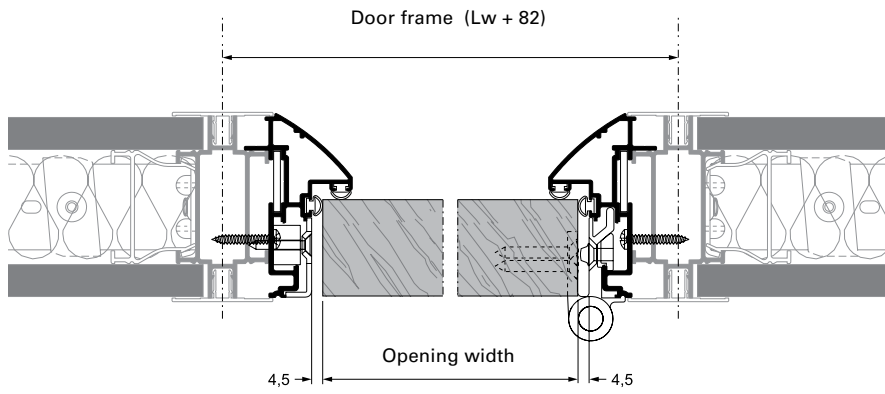


Glass door

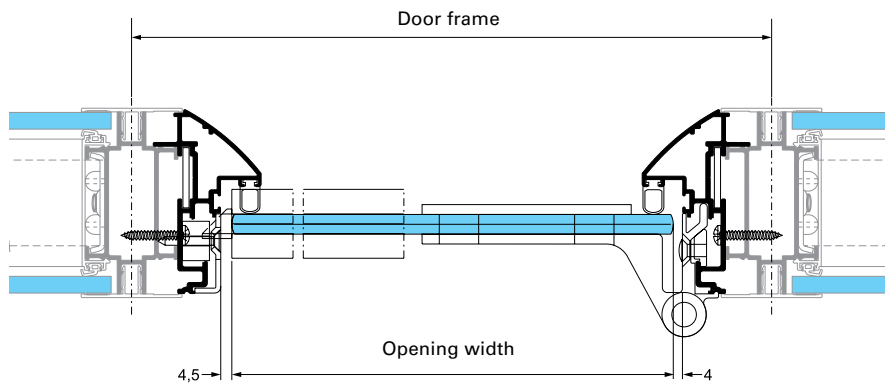

Aluminium door

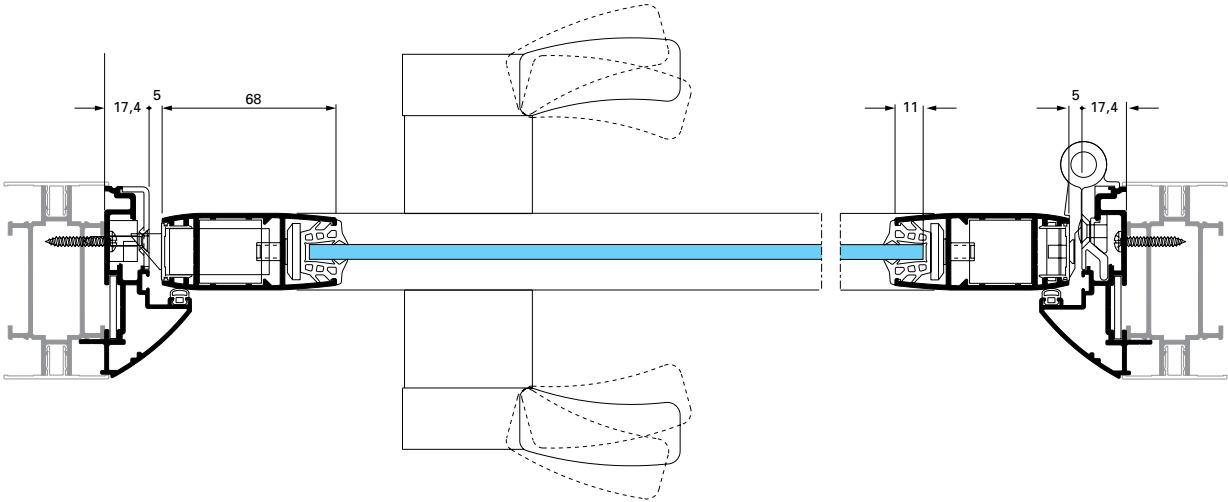

Full-access sliding door

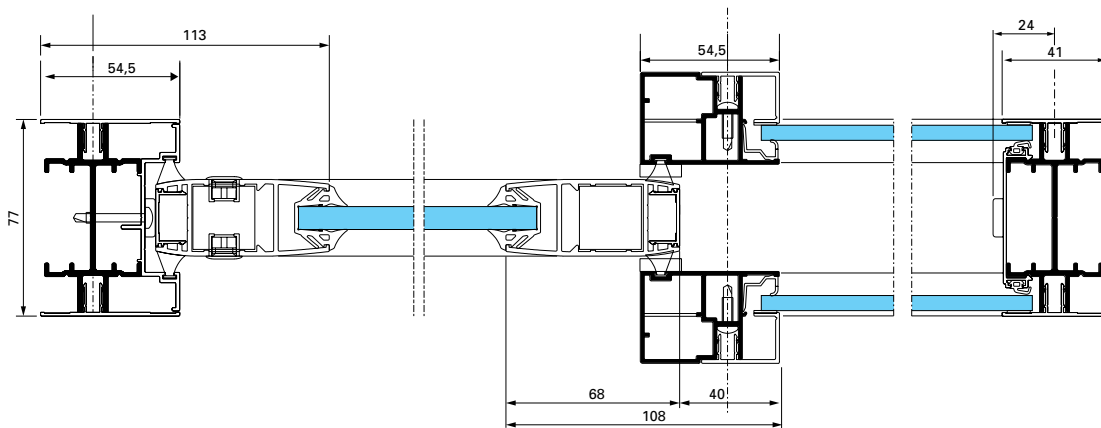

Applications

Standard partition



Full-height solid module



Full-height glazed module



Glazed module on a solid apron wall



Module multi-transom

Flat partition with narrow rail



Full-height solid module



Full-height glazed module



Glazed module on a solid apron wall



Multi-crosspiece module



Adjustable module

Flat partition with recess junction




Full-height solid module




Glazed module on a solid apron wall


Hinged doors




Frame for wooden door




Frame for wooden door under a mullion




Frame for safety glass door




1-leaf door, pocket glazing with handle



2-leaf door, pocket glazing with handle




1-leaf door, pocket glazing with knob




2-leaf door, pocket glazing with knob


Full-access sliding door

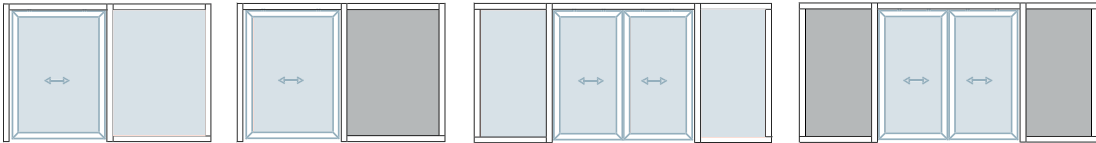

Full-access sliding door
1 and 2 leaves without transom

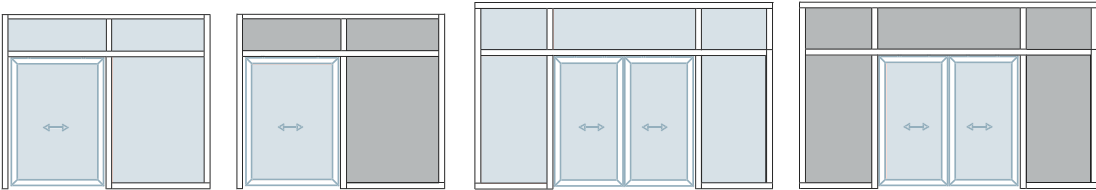

Full-access sliding door
1 and 2 leaves with transom

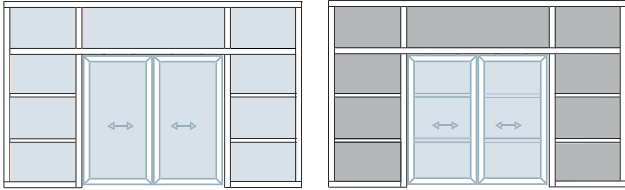

Performance

ACCOUSTIC PERFORMANCE		
Type		Certification
Solid moveable partition	39 dB	CER.FF. C.07-433
Solid moveable partition + door	31 dB	CER.FF. C.07-433
Full-height glazed partition 44.2	42 dB	CER.FF. C.07-433
Solid standard partition	42 dB	n°2312.6.575
Solid plaster-coated standard partition	44 dB	n°2312.6.575
Glazed standard partition/2-sided apron wall 44.2	41 dB	n°2312.6.575
Glazed standard partition/1-sided apron wall 44.2	35 dB	n°2312.6.575

16

MECHANICAL STABILITY		
DURABILITY	Applications	Certification
To a soft body shock (bag of 50 daN with an energy of 120 J applied to the centre of the modules of solid and glazed partitions).		
Shock with sand bag 120 J	Solid modular partition with door	CER.FF. C.07-433
Shock with sand bag 120 J	Glazed modular partition with door	CER.FF. C.07-433
To horizontal force (force of 50 daN applied 1.5 m from the ground where the two panels meet)		
Horizontal push 50 kg	Solid modular partition with door	CER.FF. C.07-433
Horizontal push 50 kg	Glazed modular partition with door	CER.FF. C.07-433
SECURITY	Certification	
To a soft body shock (bag of 50 daN with an energy of 300 J applied to the centre of the modules of solid and glazed partitions)	CER.FF. C.07-433	
To a soft body shock (bag of 50 daN with an energy of 400 J applied to the centre of the modules of solid and glazed partitions)	European Technical Approval	
To a rigid body shock (marble 1 kg, energy of 10 J, imprint < Ø 20, depth < 2 mm)	CER.FF. C.07-433 / European Technical Approval	

MODULARITY

Modular partition with door: modified installation, interchangeability, tolerance adjustments and adaptation to uneven surfaces

CER.FF. C.07-433

MAXIMUM WEIGHT

Weight per wooden door leaf with split hinges

80 kg

Weight per wooden door leaf with split hinges

40 kg



Materials and parts

As with all Technal systems, only the highest quality materials and components are used to minimise maintenance and ensure long-term performance.

- The aluminium profiles are extruded from 6060 T5 EN 12020, EN 573-3, EN 515 and EN 775-1 to 9 alloys.
- Fittings are cast from EN 12844 compliant Zamak 5.
- All gaskets are EPDM or TPE (Thermoplastic elastomer).
- The polyamide thermal breaks are extruded from pA6-6 (0.25 FV).
- Screws are made from stainless steel.

Finishes and colours

A wide range of finishes and colours is available to meet individual project requirements, enhancing existing buildings and offering architects and designers greater design freedom:

- Natural anodised in accordance with EN 123731: 2001.
- Polyester powder coating finishes in a wide range of colours in accordance with "QUALICOAT".
- OPALÉ is also available in lacquered finishes with exclusive Technal colours for a stylish and contemporary look.





1



2



3

1. Photography: Xavier Boymond
2. Architect: ABM Cabinet architecture 37 St-Cyr Photography: Xavier Boymond
3. Architects: J-P. Dhalluin et Ph. Peny Photography: P. Loubet